MX 134

8 CHANNEL AUDIO/VIDEO PRE-AMP (TUNER READY)

FRONT PANEL: **Glass with illuminated teal/gold nomenclature.** TRIM LEVEL **control.** INPUT B **(record) control. Digital display:** ZONE B / SIGNAL **strength,** % VOLUME / FREQUENCY **and** ZONE A / PRESET. INPUT A **(listen) control.** VOLUME **control.** 7 TRIM SELECT **control:** OFF, SUBWOOFER, SURROUND SPEAKER, CENTER SPEAKER, TREBLE, BASS, LOUDNESS, DISPLAY. INPUT FORMAT **lights:** L, S, R, LFE, LS, S **and** RS. PROCESSING FORMAT **(lighted):** DTS, **Dolby** PRO LOGIC II, DOLBY DIGITAL **and** THX REF. OUTPUT FORMAT **(lighted):** L, C, R, SUB, LS, RS. SURROUND MODE **control:** STEREO, MUSIC 3, MUSIC 2, MUSIC 1, CINEMA, THX CINEMA, EXTERNAL, MONO. 7 IR **sensor window. Touch buttons:** SYS OFF, REC LOCK **(with indicator),** SET UP, , TUNING, TUNING •, SELECT, ENTER, ƒ PRESET , PRESET „, BACK CHANNEL MODE, LATE NIGHT, STANDBY/ON **(with indicator),** POWER ON **or** OFF. **Has hand remote HR 132.** AM/FM **TM 1 tuner is optional.**

BACK PANEL: **37 pin** TO MULTI-ZONE CONTROLLER **connector.** OUTPUTS: ZONE A FIXED, VCR 2 AND VCR 1. **Analog** INPUTS: DVD, VCR 2, VCR 1, LV, TV, SAT, TAPE 2, TAPE 1, CD 2, CD 1, AUX, TUNER. **Space reserved for optional TM 1 tuner module:** ANTENNA 2: **external** AM ANTenna **(RAA1).** 7 **Zone** A **monitor** COMPONENT VIDEO OUTPUTS: Y, PR **and** PB. COMPONENT VIDEO INPUTS **(2):** Y, PR **and** PB. **Composite and S-video** VIDEO OUTPUTS: ZONE B **and** A OUTPUT MON, VCR 2 **and** VCR 1. **Composite and S-video** VIDEO INPUTS: DVD, VCR 2, VCR 1, LV, TV, SAT, TAPE 2, TAPE 1, CD 2, CD 1, AUX. 7 OPTICAL **and** COAXIAL DIGITAL OUTPUTS. COAX DIGITAL INPUTS **for** CD2, TV **and** DVD. OPTICAL DIGITAL INPUTS **for** CD1, SAT **and** LV. DATA PORTS: SUM A, SUM, HOME, DVD, VCR 2, VCR 1, LV, TV, SAT, TAPE 2, TAPE 1, CD 2, CD 1, AUX, TUNER. **Space reserved for optional TM 1 tuner**

module: 75 Ω FM ANTenna coax input. 7 Power cord receptacle. KEYPAD connectors: ZONE A and ZONE B. IR INPUTS for external sensors: IR POWER, zone A and ZONE B. RS232 CONTROL connector. POWER CONTROL OUT for ZONE A, ZONE B, ACCessory and VIDEO. ZONE B OUTPUTS. 8-channel EXTERNAL INPUTS for processor: L BACK, L SURRound, CENTER, L FRONT, R BACK, R SURRound, SUBWOOFer, R FRONT. 25 PIN MULTI-CHANNEL AMPLIFIER connector. ZONE A OUTPUTS: L BACK, L SURRound, CENTER, L FRONT, R BACK, R SURRound, SUBWOOFer, R FRONT.

PREAMPLIFIER SECTION: ***Response:*** **20-20kHz (+0 -0.5dB).** ***Distortion:*** **0.005%.** ***Input Sensitivity and Impedance:*** **22K ohms; line level: 100mV.** ***Voltage Gain:*** **14dB main.** ***Signal to Noise Ratio:*** **Greater than 100dB A weighted.** ***Output:*** **main 2Vrms.** ***Output Impedance:*** **47 ohms at all outputs. Has hand remote HR 134.**

WITH OPTIONAL TM 1 AM/FM TUNER:

AM SECTION: ***Sensitivity:*** **20uV.** ***S/N:*** **48dB.** ***Distortion:*** **0.5%.** ***Response:*** **50-6000Hz (NRSC).** ***Adjacent Channel Sensitivity:*** **55Db minimum IHF.** ***Image Rejection:*** **65dB.**

FM SECTION: ***Sensitivity:*** **1.4uV (14dBf).** ***Distortion:*** **0.45% in stereo.** ***Response:*** **20-15kHz (+0 -1.0dB).** ***Image Rejection:*** **75dB.** ***Stereo Separation:*** **50dB.** ***Alternate Channel Selectivity:*** **75dB IHF.**

Power Requirements: **120 Volts, at 65 watts.**

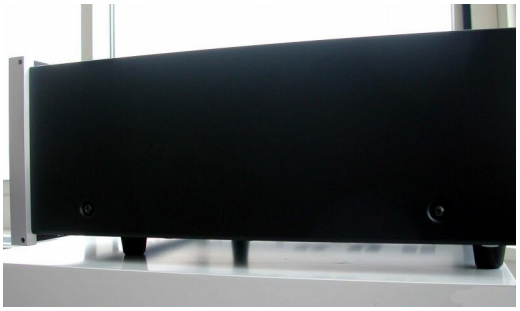

MX 134 - Sold from 2001 - 2004. **S/N: TR1001~TR????**

Size: **7-1/16 H, 17-1/2"W and 21"D.** ***Weight:*** **32.5 lb.** ***$7,100.00***